

WMHC-445-Deluxe Installation

WMHC-445-Deluxe


ADA Compliant Lever Handles

Shown with Hand Held Sprayer & Hose and 6" Shower Head

1. Water Supply Line should be roughed in at approximately 42" from flooring surface with 6 to 8 inch spread
2. Attach Supply Arms and Flanges to 1/2" threaded Water Supply Pipe.
3. Place one Mounting Bracket over Riser and tighten set screw at desired position.
4. Install Riser to 1/2" valve on Faucet using Teflon Tape
5. Attach Supply Arms to Body with Washers inside Union Nut.
6. Attach unit to wall by marking position using wall brackets. Stainless Steel Screws are recommended.
7. Attach Stainless Steel Hose & Hand Sprayer to end of pipe using Teflon Tape.
8. Attach Shower Head to Riser. Teflon Tape is not needed

- 304 Quality Stainless Steel
- Hot & Cold Water
- ADA Compliant Lever Handles
- Hand Held Sprayer with 4' Flexible Stainless Steel Hose
- Adjustable Sprayer Bracket
- Available with 6" Shower Head
- Brass w/ Polished Chrome Finish Faucet
- 38" Stainless Steel Riser
- Commercial Grade Accessories
- Adjustable Stainless Steel Mounting Brackets (2) w/ Set Screws
- Water Supply Line Placement at 42" from Flooring Surface
- Adjustable 4"-8 3/8" Center
- 1/2" NPT

Stainless Steel Hose Connection →

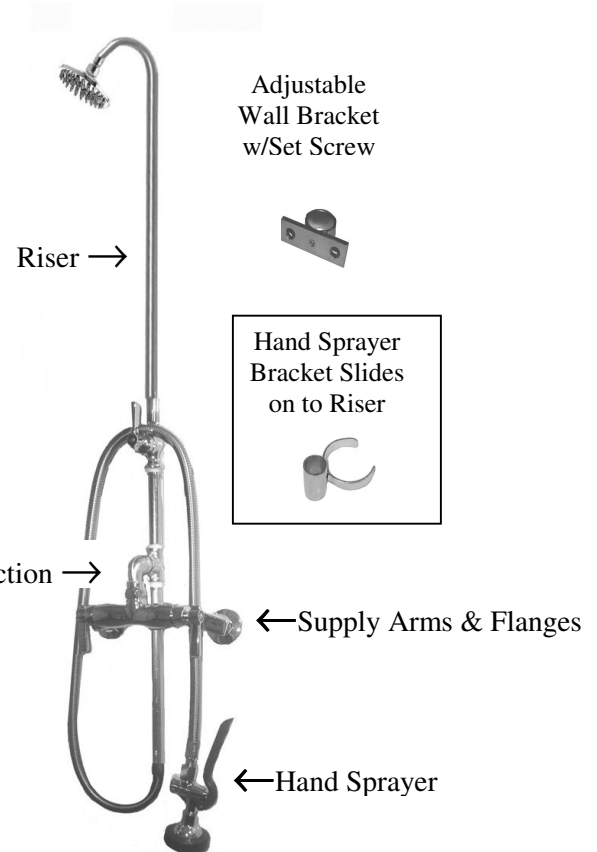

When ordering the WMHC-445-Deluxe, please specify the model # for each accessory.

#HS-8083-44 - Hand Held Sprayer, Bracket & Hose

#AV-442-CHV - Foot Shower (Cross Handle Valve)

#AV-442-ADA - Foot Shower (Metered Push Valve)

#HBA-158 - Hose Bibb & Adapter

#SH-DA-6 - 6" Sunflower Shower Head